zens

Installation Guide and Manual

PuK 2
Built-in wireless charger
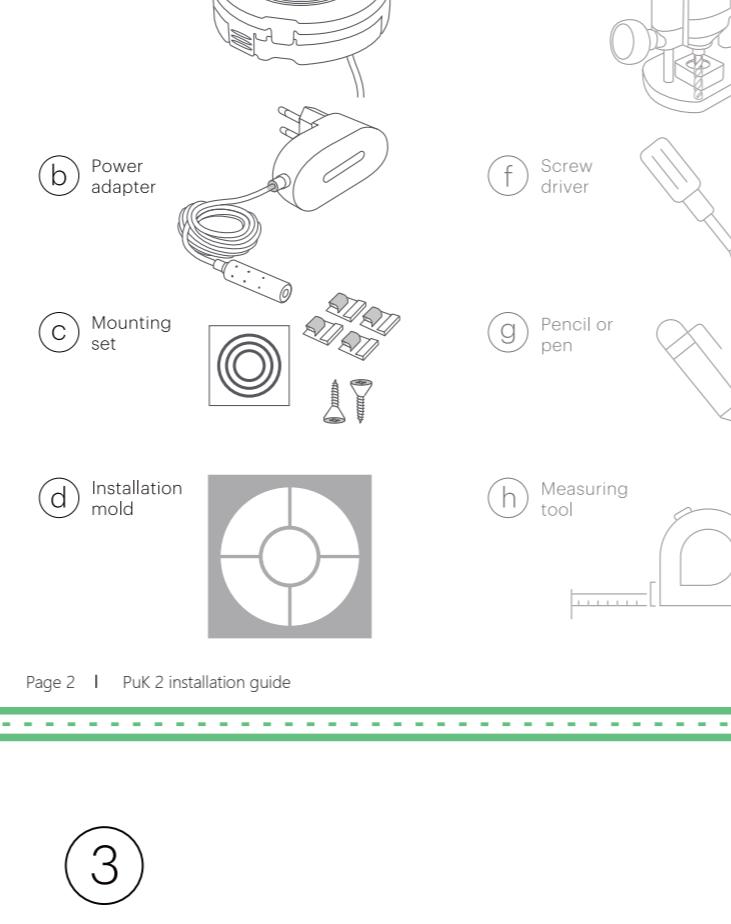ZETC09N/00

CE FC

Zens B.V.
High Tech Campus 85
5656 AG Eindhoven, The Netherlands
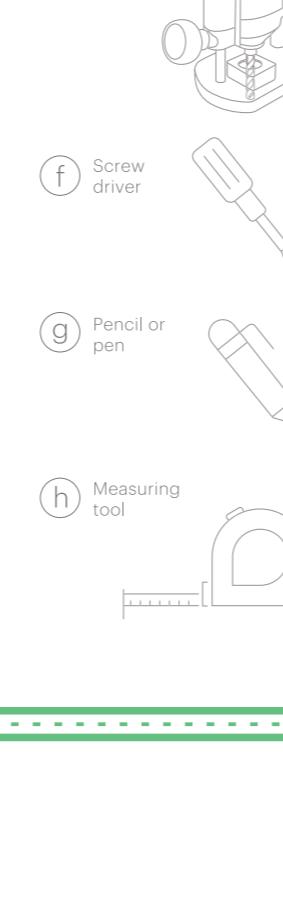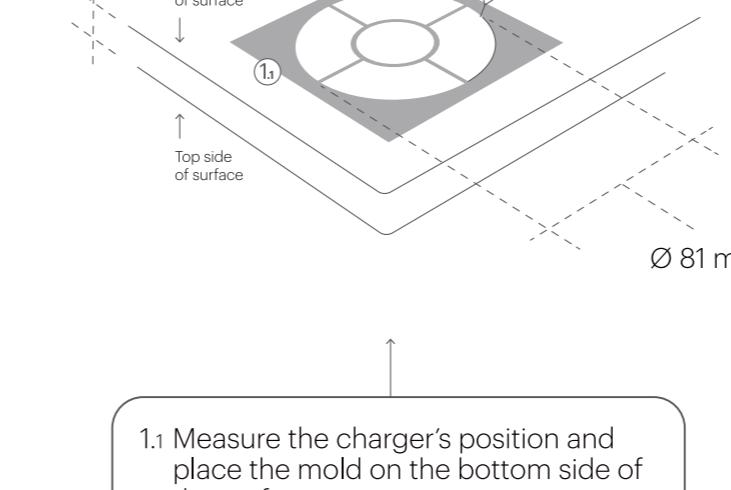Phone: +31 40 218 0088
www.makezens.com

Sub-surface installation

Included items

a. PuK 2
b. Power adapter
c. Mounting set
d. Installation mold

Required tools (not included)

- Milling machine
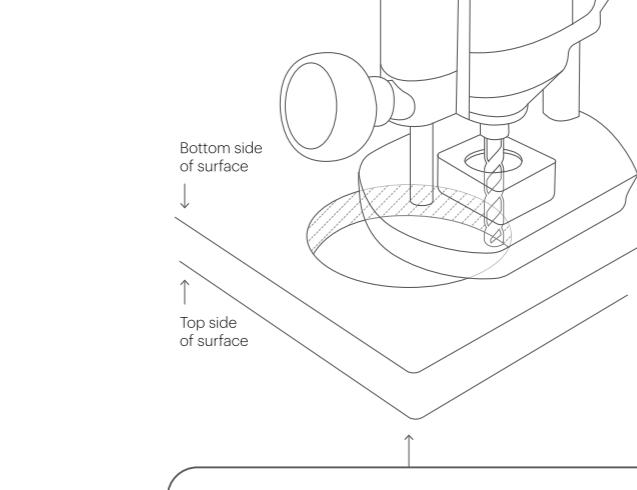- Screw driver
- Pencil
- Measuring tool

①
Ø 81 mm

1: Measure the charger's position and place the mold on the bottom side of the surface.
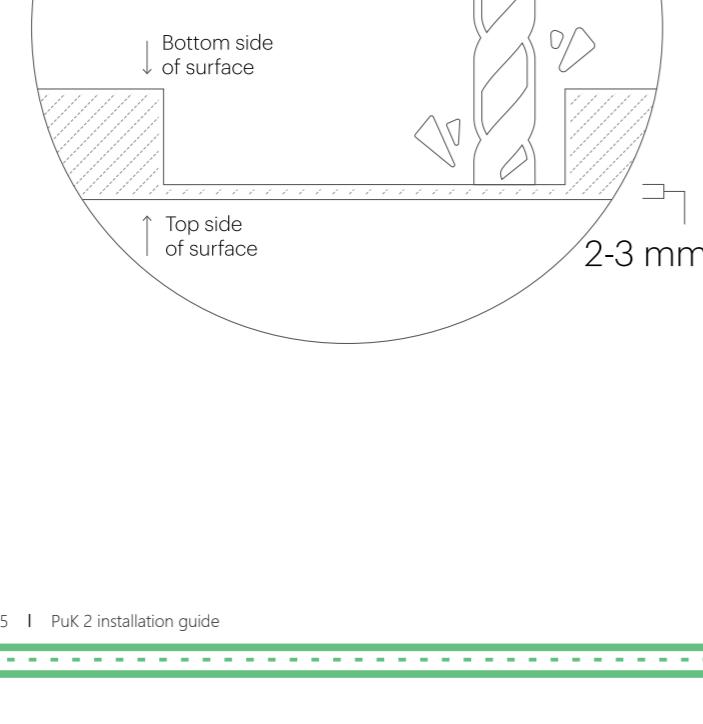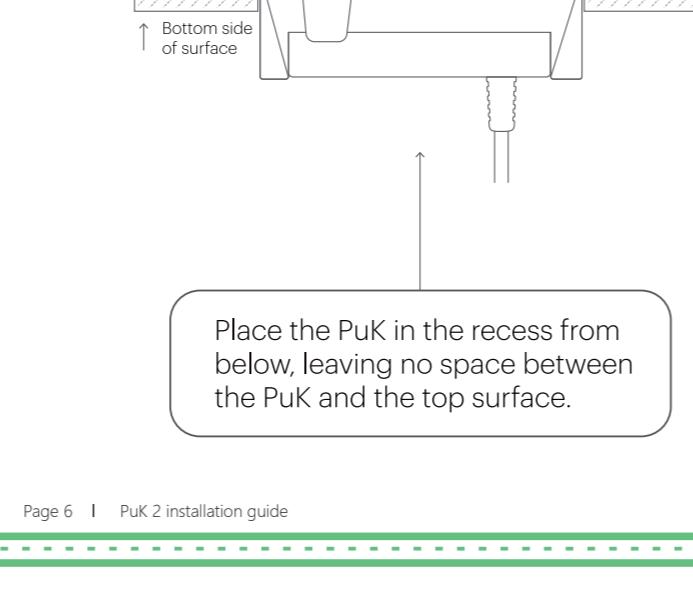2: Draw the circle to indicate the position of the charger.

②

Mill out the material from below. The surface above the recess must be 2-3 mm thick.

③
2-3 mm

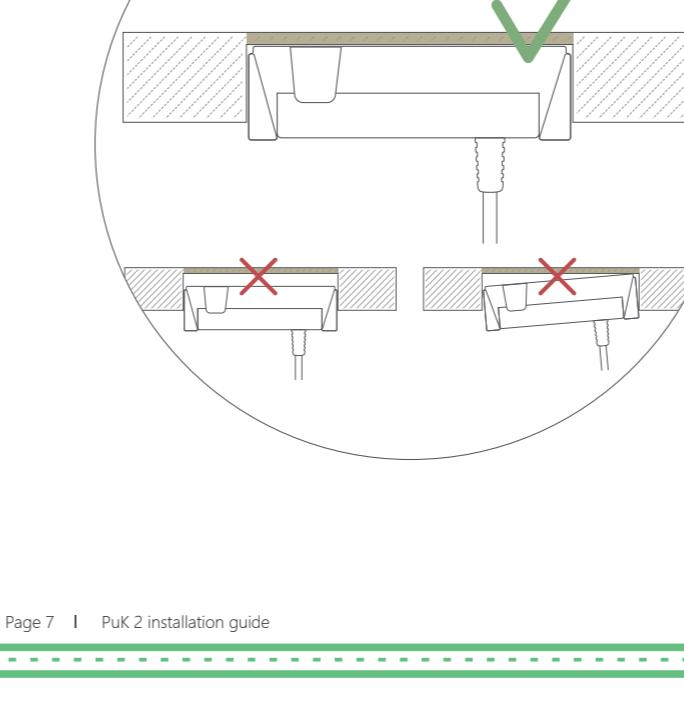Place the PuK in the recess from below, leaving no space between the PuK and the top surface.

Place the PuK in the recess from below, leaving no space between the PuK and the top surface.

④

Use the two screws to fasten the PuK in the recess.

⑤

Use the cable clips to secure the cable.

⑥

6.) Measure the exact location of the PuK and align it with the mold on the top surface.
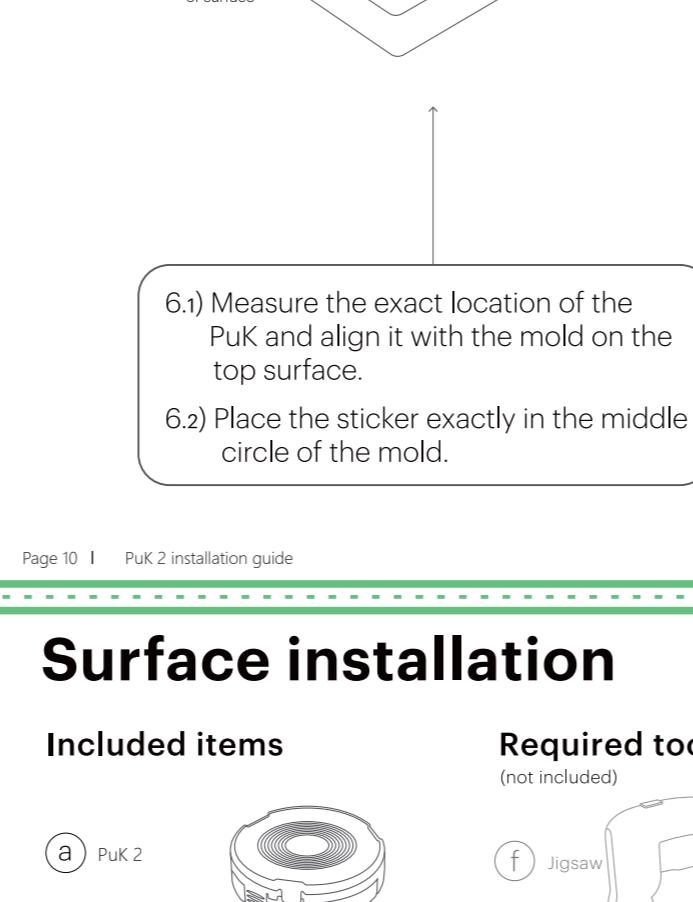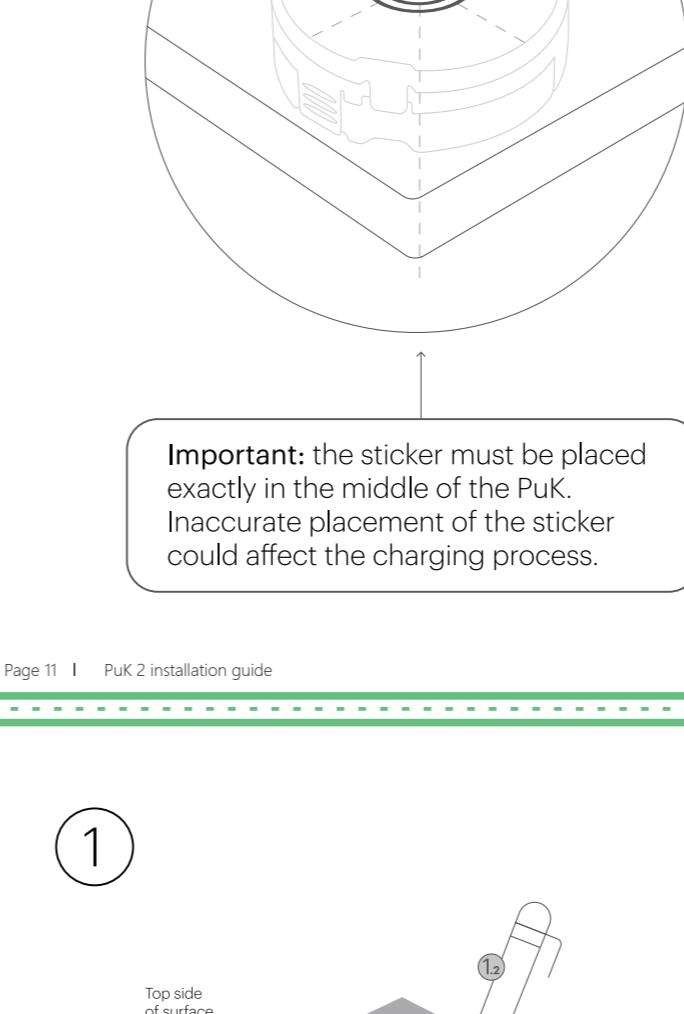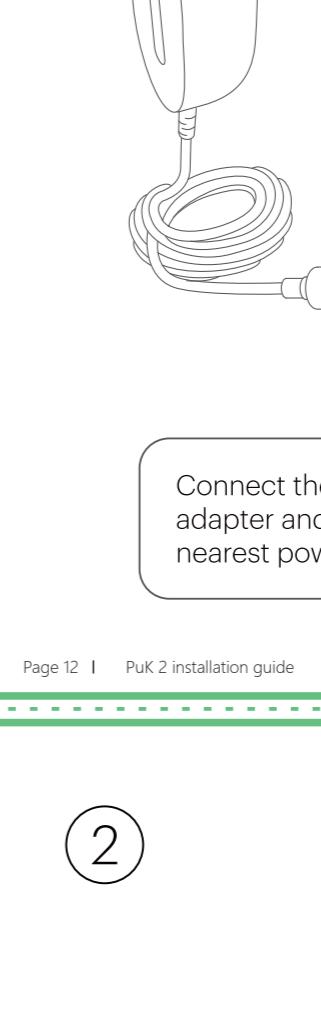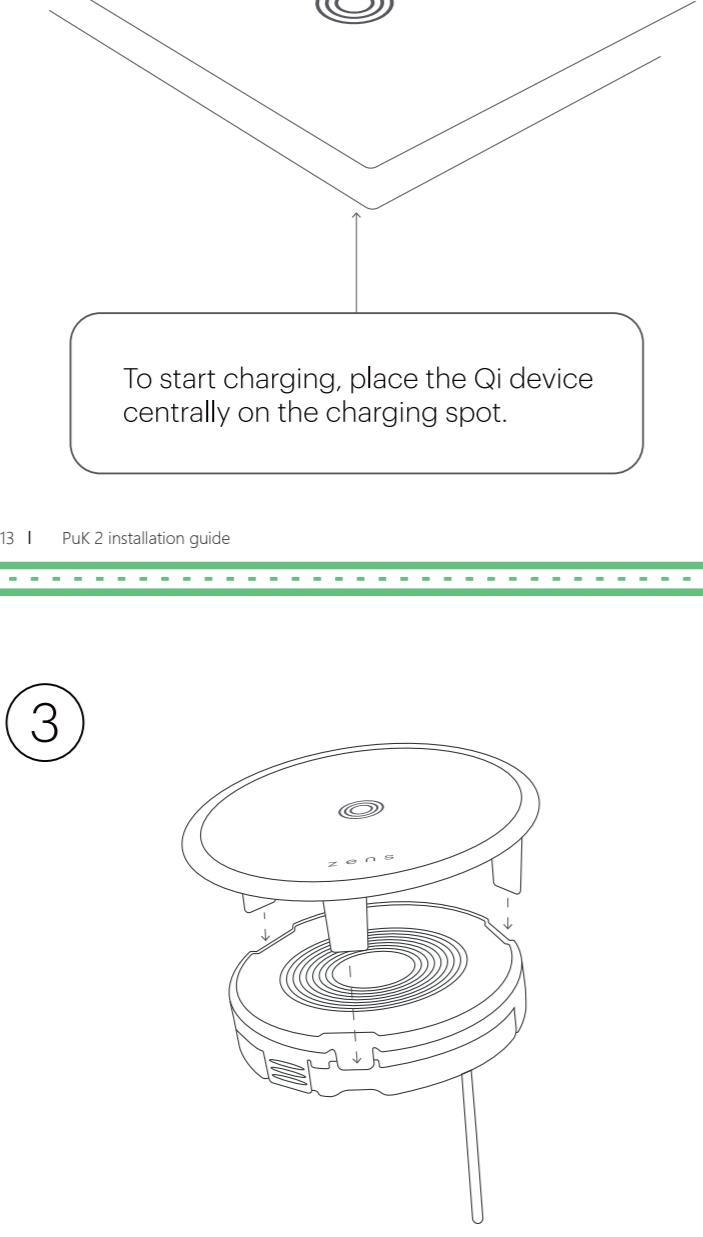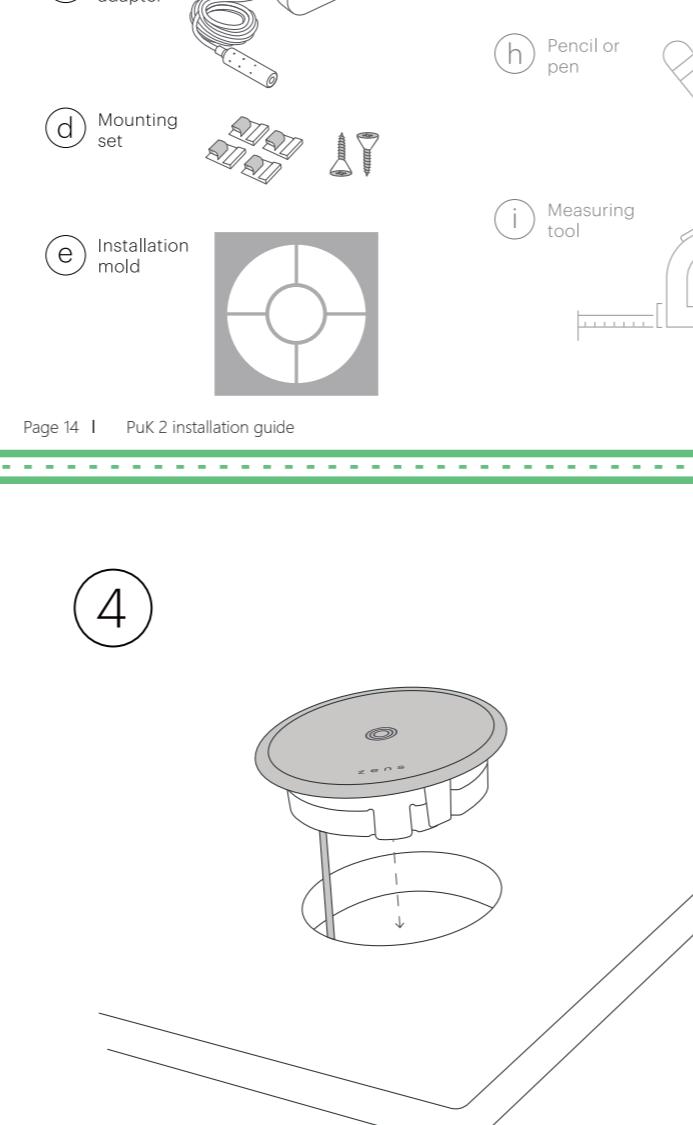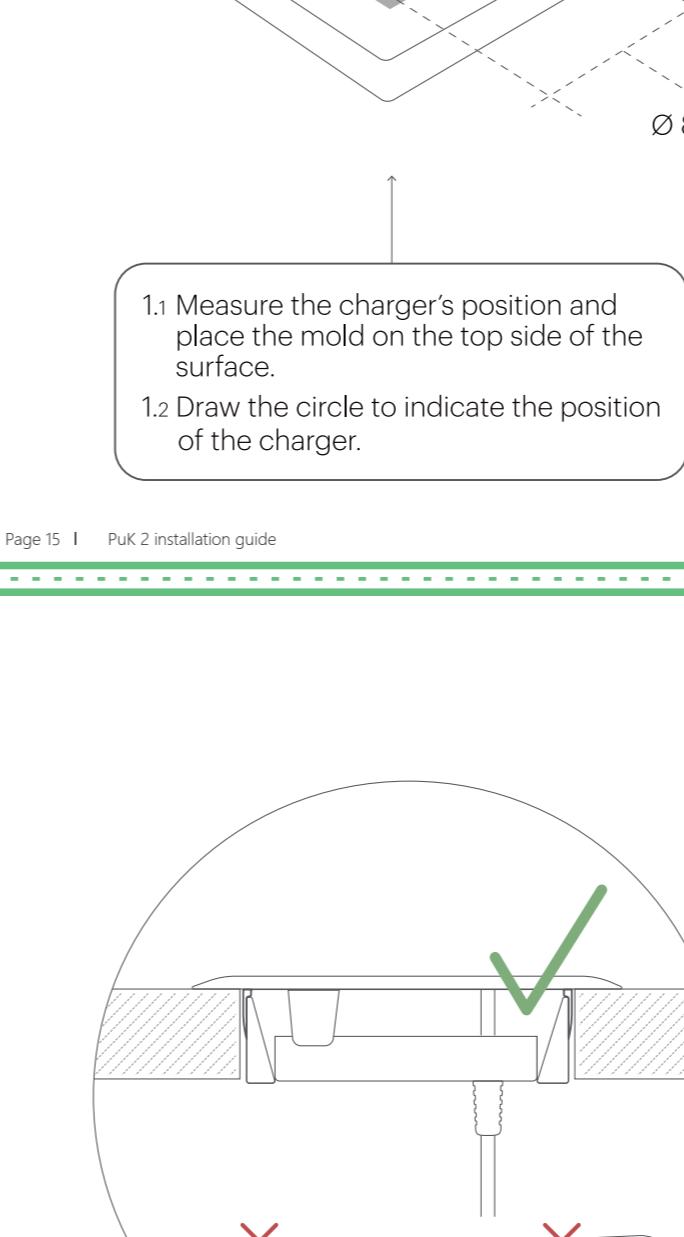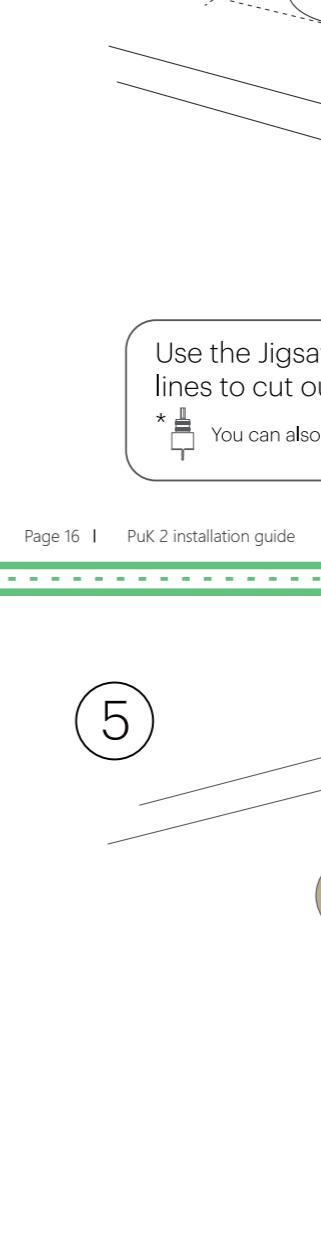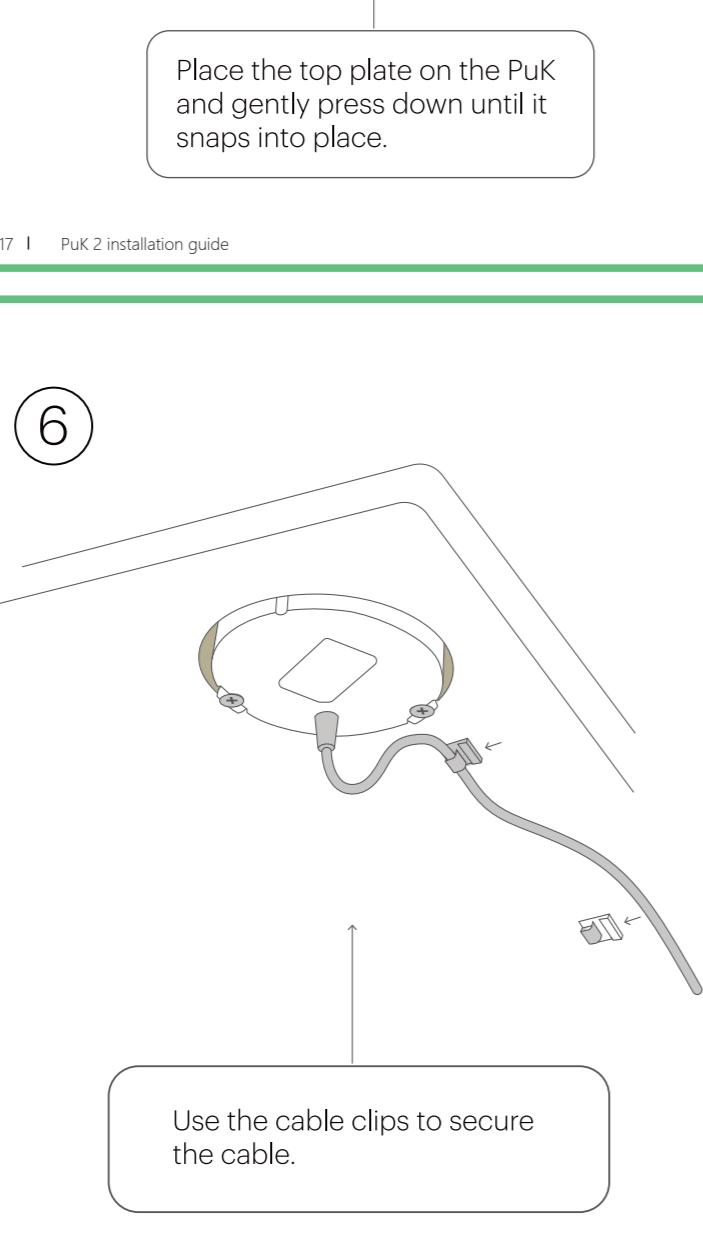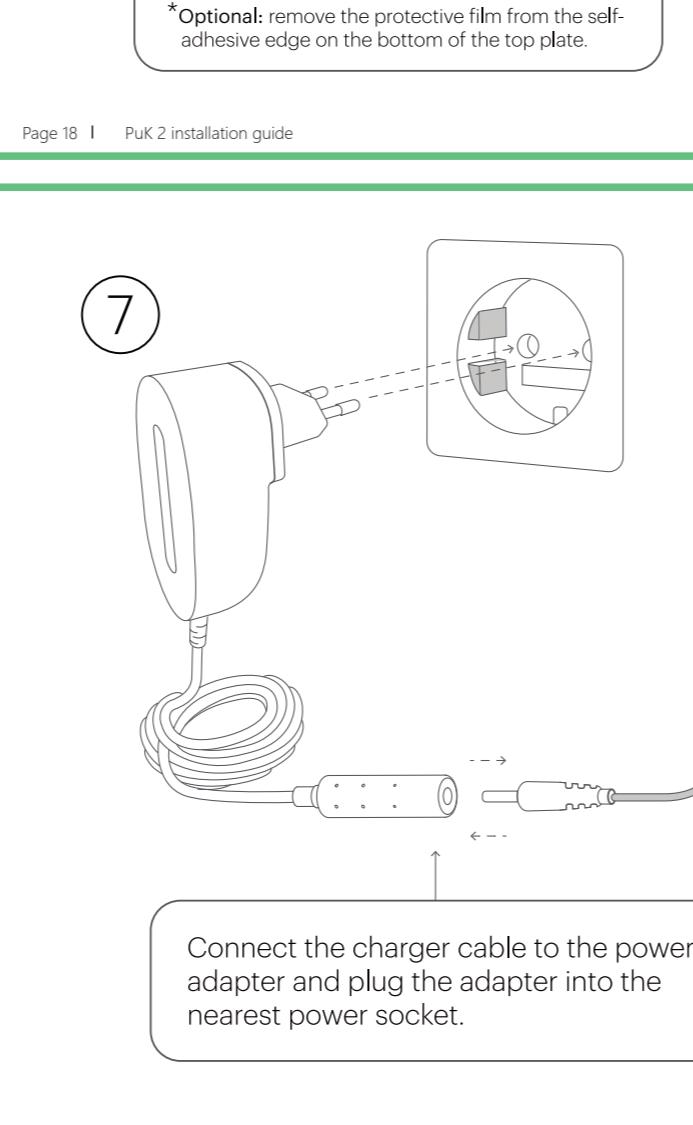6.) Place the sticker exactly in the middle circle of the mold.

⑦

Important: the sticker must be placed exactly in the middle of the PuK. Inaccurate placement of the sticker could affect the charging process.

⑧

Connect the charger cable to the power adapter and plug the adapter into the nearest power socket.

⑨

To start charging, place the Qi device centrally on the charging spot.

Surface installation

Included items

a. PuK 2
b. Top plate
c. Power adapter
d. Mounting set
e. Installation mold

Required tools (not included)

- Jigsaw
- Screw driver
- Pencil or pen
- Measuring tool

①
Ø 81 mm

1: Measure the charger's position and place the mold on the top side of the surface.
2: Draw the circle to indicate the position of the charger.

②
81 mm

Use the Jigsaw and follow the drawn lines to cut out the hole.
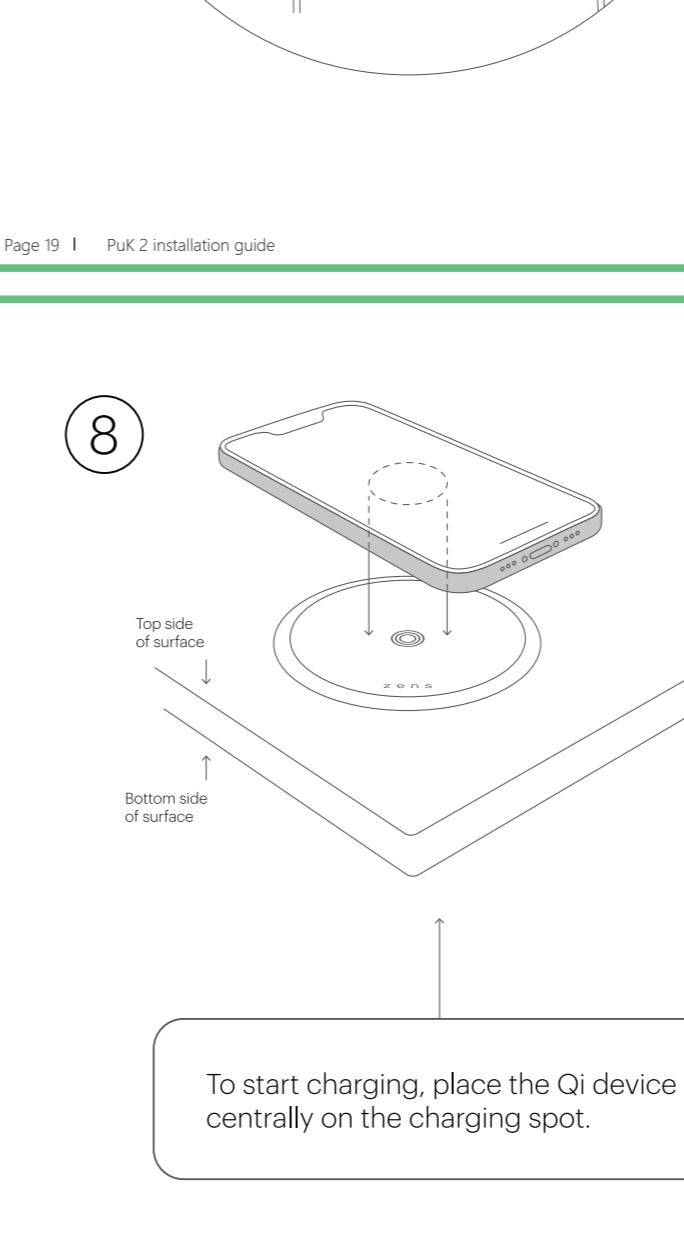*You can also use an Ø81 mm hole drill.

③

Place the top plate on the PuK and gently press down until it snaps into place.

④

Insert the PuK with attached top plate* in the opening from above.
*Optional: remove the protective film from the self-adhesive edge on the bottom of the top plate.
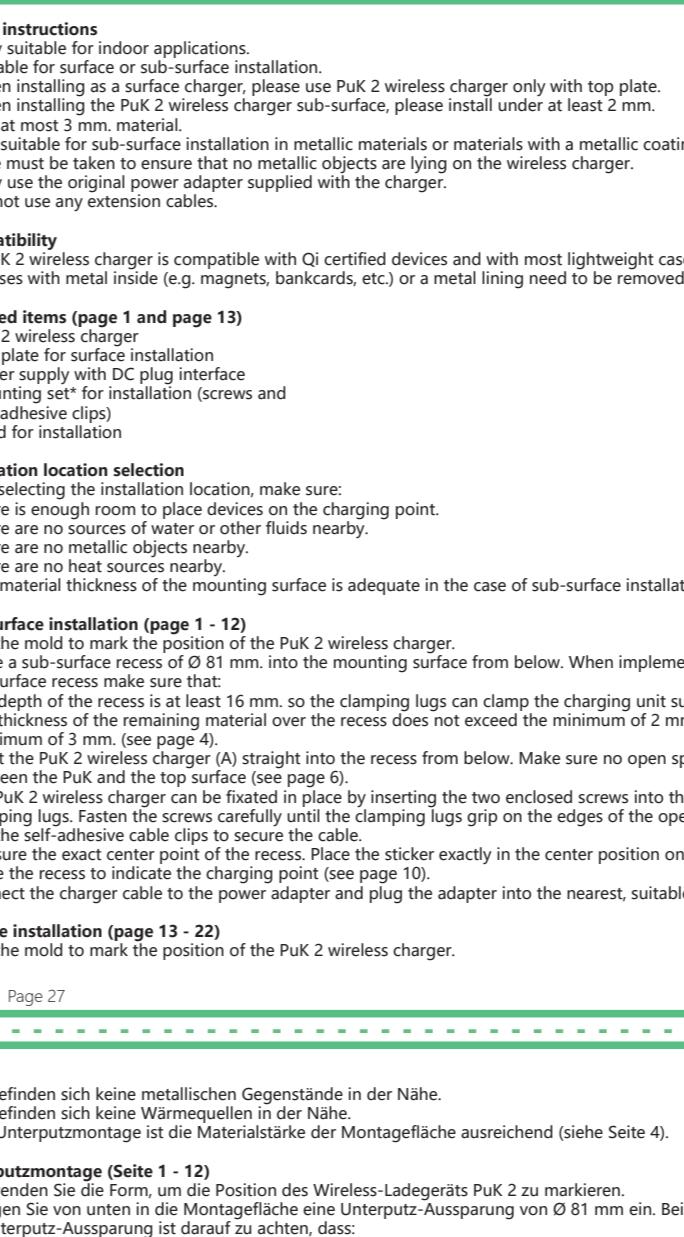
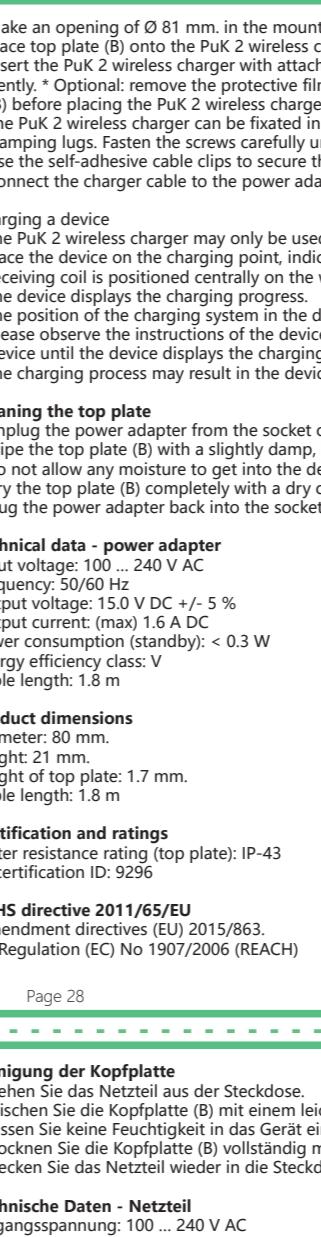⑤

Use the two screws to fasten the PuK in the opening.

⑥

Use the cable clips to secure the cable.

⑦

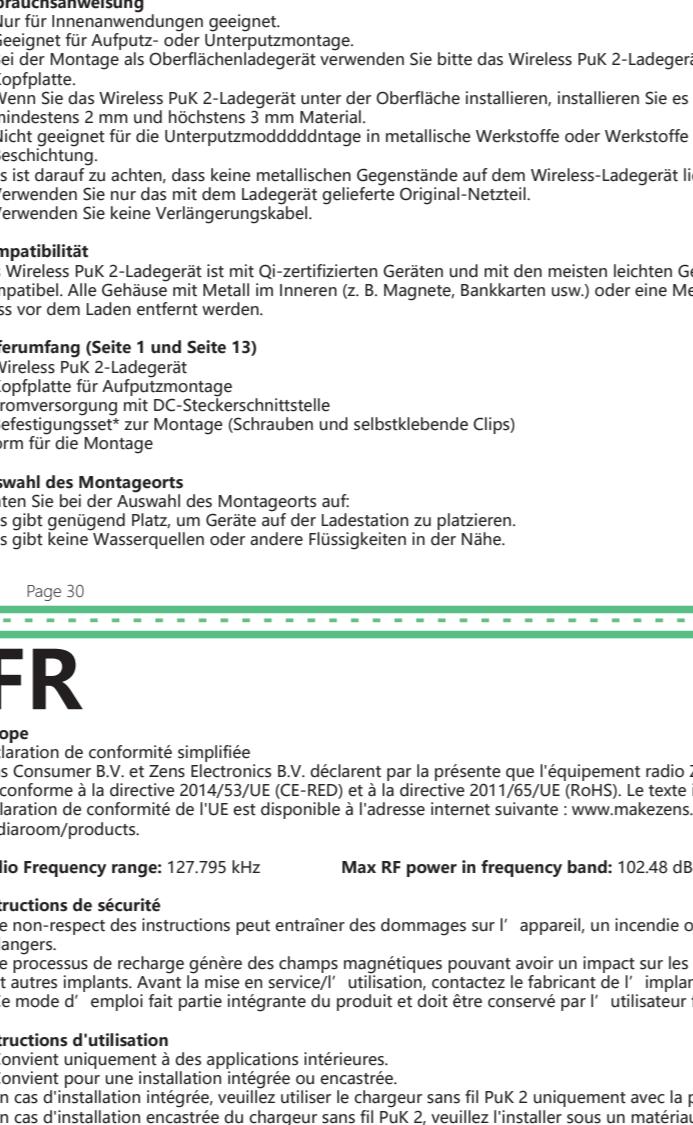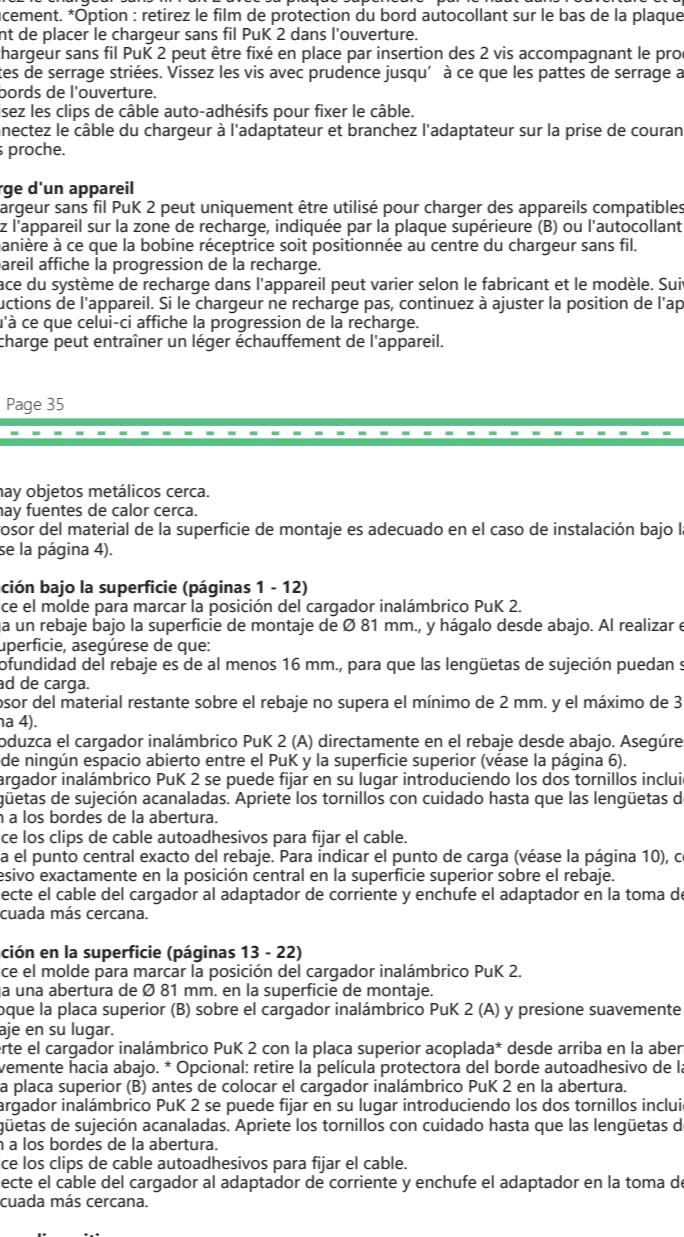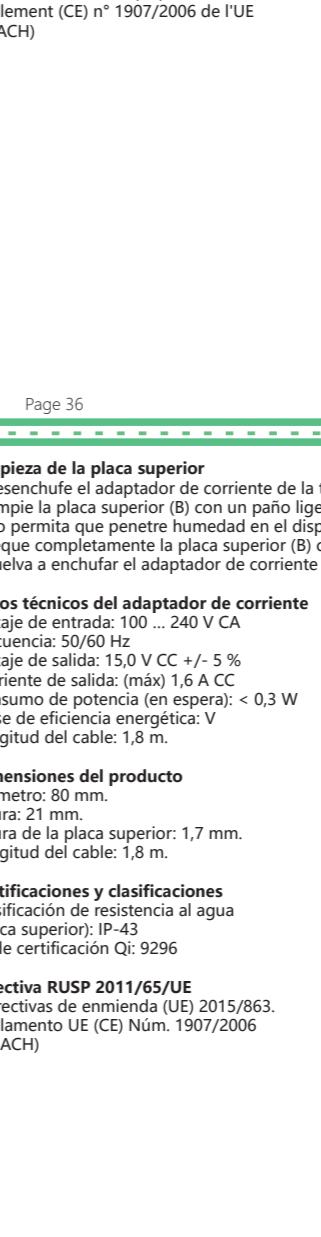Connect the charger cable to the power adapter and plug the adapter into the nearest power socket.

⑧

To start charging, place the Qi device centrally on the charging spot.

zens

Manual

PuK 2
Built-in wireless charger
ZETC09N/00

GB

Europe — Simplified Declaration of Conformity. Hereby, Zens Consumer B.V. and Zens Electronics B.V. declares that the radio equipment device ZETC09N/00 is in compliance with the Directive 2014/53/EU (CE-RED) and Directive 2011/65/EU (RoHS). The full text of the EU declaration of conformity is available at the following internet address: www.makezens.com/meldoitory/declarations.

North America — FCC statement ...

Radio Frequency range: 127.795 kHz — Max RF power in frequency band: 102.46 dBuA/m

(Full regulatory text continues in GB, DE, FR, ES sections)

DE

PuK 2
Eingebautes Wireless-Ladegerät
ZETC09N/00

FR

PuK 2
Chargeur sans fil intégré
ZETC09N/00

ES

PuK 2
Cargador inalámbrico incorporado
ZETC09N/00